## Oxequip / Medstar Compatible





## **Features:**

Flow rate exceeds the requirements of NFPA

Accepts only Oxequip / Medstar gas specific adapters

100 % Hydrostatic testing of each outlet and cleaned for medical gas service

Indexed to eliminate interchangeability of gas services

Up to 3/4" [19 mm] mounting plate thickness adjustment

360° swivel inlet pipe for easy installation

## **General Specifications:**

The medical gas outlet shall be an Amico Alert-1 series.

Outlets shall be manufactured with a 6 - 1/2" [165 mm] length type "K" 1/2" [12.7 mm] outside diameter (3/8" nominal) size copper inlet pipe stub which is silver brazed to the outlet body. The body shall be of 1 - 5/16" [33 mm] diameter, one piece brass construction. For positive pressure gas services, the outlet shall be equipped with a primary and secondary check valve and the secondary check valve shall be rated at a maximum of 200 psi [1,379 kPa] in the event the primary check valve is removed for maintenance. Outlet bodies shall be gas specific by indexing each gas service to a gas specific dual pin indexing arrangement on the respective identification module.

A large color coded front plate shall be used for ease of gas identification and aesthetic appeal.

With the back rough-in mounted, the outlet shall adjust up to 3/4" [19 mm] variation in mounting plate thickness.

The latch-valve assembly shall be Oxequip/Medstar type and only accept corresponding Oxequip/Medstar type gas specific adapters.

All outlets shall be cleaned and degreased for medical gas service, factory assembled and tested.

The outlets are UL Listed and ETL Listed.

Amico products comply with NFPA-99.




1

## **Technical** Specifications



2

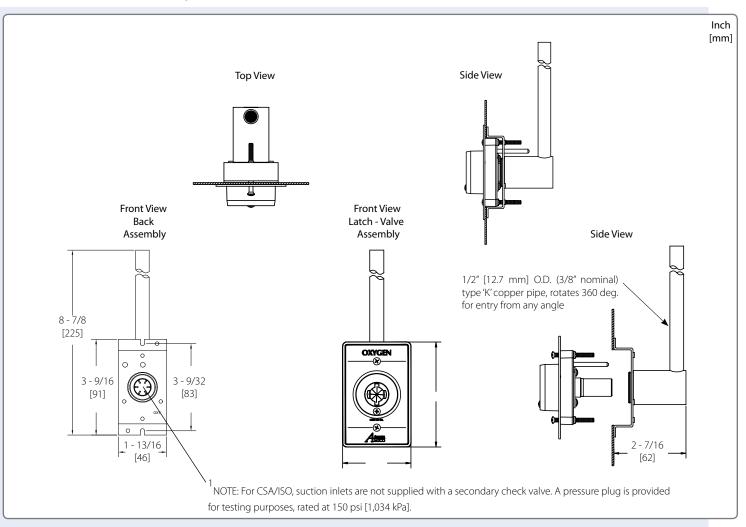

Model Numbers			
Front Latch Valve:  O-FASC-OX-L-XXX	The L defines the Language:  U = English (NFPA) Oxygen, Medical Air, and Medical Vacuum  E = English (CSA/ISO)  F = French (CSA/ISO)	Medical Air  Nitrous Oxide  MedVac¹  =	= OXY = AIR = N2O = VAC
Console Assembly:  O-OXCON-L-XXX		Waste Anesthetic Gas Disposal (NFPA)	= WAG
Example: Oxygen NFPA = <b>0-OXCON-U-OXY</b> M.R.I. Model Numbers			= AGS = CO2
Console Assembly:  O-OXCONM-L-XXX		<sup>1</sup> Please see note above	
Front Latch Valve:  O-FAMC-OX-L-XXX			

Example: English Console Assembly = O-OXCONM-U-OXY